


VIA PERIMETER



Via Perimeter recessed

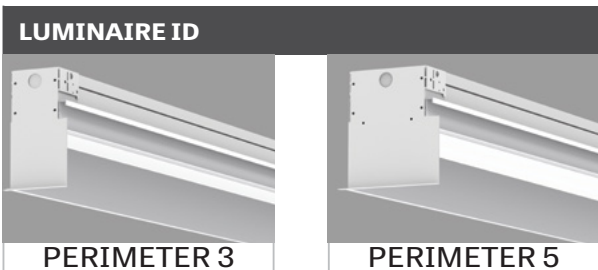


Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

FLANGE HEIGHT	Leveled, Shallow, Deep
LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
LUMINAIRE LENGTH	Individual Units & Continuous Runs
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, LDE1, LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST, Trim, Trimless & Mud flange
FINISH	White
OPTIONS	Fuse, Chicago Plenum, Flexible Whip Cable

ADJUSTABLE SLEEVES

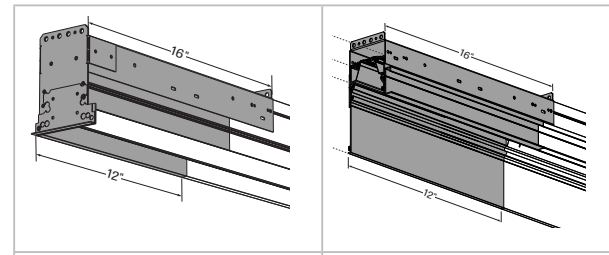

TES - Optional adjustable end sleeve (for a minimum 5ft fixture length)

#TMS - Optional adjustable mid sleeve (for patterns only)


Adjustable sleeve is designed to provide on-site luminaire adjustability of +2.5" to -4.5". A sleeve accommodates an easy installation and maintenance. Available for fixtures over 5ft long.

The following options may require additional lead time: 347V, Other Lutron Drivers & ChromaWerx.

VIA PERIMETER PATTERNS



Via Perimeter patterns recessed

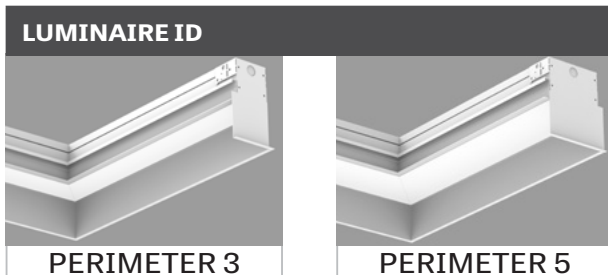

Order Check list

1. Download spec sheet from www.lumenwerx.com.
2. Specify the product as per the information on this page.
3. PO must clearly indicate LumenXpress.
4. Send an email to lumenxpress@lumenwerx.com along with a PO and a formal quote # or price confirmation.

FLANGE HEIGHT	Leveled, Shallow, Deep
LIGHT SOURCE	LED
CRI	80 CRI, 90CRI
COLOR TEMP.	30k, 35k & 40k
PATTERN LENGTH	Individual Units & Continuous Runs
CORNER TYPE	Leveled Outside and Inside
CORNER DEGREE	90 degrees
VOLTAGE	120V, 277V & UNV
DRIVER	Dimming 0-10V, LDE1, LDE5
ELECTRICAL	1 circuit +EB/EM
MOUNTING	TG, TB, ST, Trim, Trimless & Mud flange
FINISH	White
OPTIONS	Fuse, Chicago Plenum, Flexible Whip Cable

The following options may require additional lead time: 347V & Other Lutron Drivers