


VIA 5 PERIMETER - PATTERNS

LUMENWERX
W W W . L u m e n w e r x . C O M

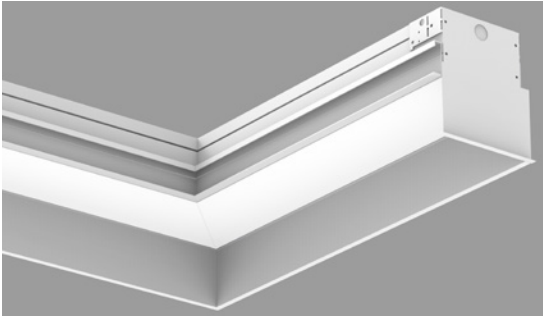

V5PERDPAT - Via 5 Perimeter Deep Pattern

DESCRIPTION

Via 5 Perimeter creates a continuously illuminated "slot" at the wall/ceiling intersection. Lighted corners with an adjustable end and middle sleeves are available. Via Perimeter installs in grid or drywall ceilings in a choice of three arrangements: level, shallow 1", and deep 3 1/4".

PROJECT: _____
TYPE: _____
NOTES: _____

IC RATED



up to 115 lm/W performance


ORDER GUIDE

LUMINAIRE ID	OPTICS	LIGHT SOURCE	CRI	LUMEN PACKAGE	COLOR TEMP.	PATTERN LENGTH
V5PERLPAT - Via 5 Perimeter Level Pattern	HLO - High-Efficiency Lambertian Optic	SW - Static white	80 - 80 CRI 90 - 90 CRI	500 - Min. low output 500lm/ft	27 - 2700K	#FT - Nominal length in feet
V5PERSPAT - Via 5 Perimeter Shallow Pattern				750 - Medium output 750lm/ft	30 - 3000K	#IN - Length in inches
V5PERDPAT - Via 5 Perimeter Deep Pattern				1000 - Max. high output 1000lm/ft #### - Other required lm/ft	35 - 3500K 40 - 4000K	Continuous Run - for luminaires over 12'


CORNER TYPE	CORNER DEGREE	VOLTAGE	DRIVER ²	ELECTRICAL	MOUNTING
LEVO - Leveled outside corner LEVI - Leveled inside corner	90(#) - 90 degrees, specify number of corners (#) #(#) - Other degrees, specify the angle degree #, followed by the number of corners (#)	120 - 120V 277 - 277V UNV - 120V-277V 347 ¹ - 347V ¹ Only available with D1 driver.	D1 - 1% 0-10V DA ³ - DALI LTEA2W - Lutron 1% - 2 wire FP 120V LDE1 ³ - Lutron Hi-lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V ² PoE (Power-over-Ethernet) compatible. Consult factory for details. ³ On-site commissioning is required.	1 - 1 circuit +#EB - Emergency battery (min 4' fixture, except Lutron) +#EM - Emergency light circuit +#NL - Night light circuit +GTD - Generator transfer device	TG9 - Tegular 9/16" TG15 - Tegular 15/16" TB9 - T-bar 9/16" TB15 - T-bar 15/16" ST - Screw slot t-bar DTR - Drywall trim DTL - Drywall trimless DMF - Drywall mud flange

FINISH	CONTROLS	OPTIONS	ADJUSTABLE SLEEVE
W - Matte white CF# - Custom finish, specify RAL#	STANDALONE CONTROLS ^{4,5} OMS - Onboard Occupancy ODS - Onboard Daylight OCS - Onboard Occupancy & Daylight CONNECTED CONTROLS CCS() - LU -Lutron, EN -Enlighted, OS -Osram To specify see information on page 4 ⁴ Not available with shallow or deep fixtures. ⁵ Available with the 0-10V dimming, and 1 circuit options only.	NEF - No end flanges (for wall-to-wall installations) FU120 - Fuse 120V FU277 - Fuse 277V FWC - Flexible whip cable (6' std) CP - Chicago Plenum NA - None	TES - Optional adjustable end sleeve (for a minimum 5FT fixture length) #TMS - Optional adjustable mid sleeve (for a minimum 5FT fixture length, maximum 1 sleeve per section) IMPORTANT: see page 6 when ordering a sleeve, TES & TMS


CROSS SECTION

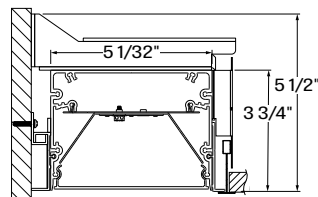

V5PERL - Via 5 Perimeter Level

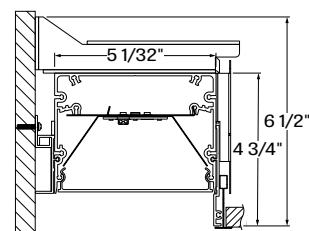


V5PERS - Via 5 Perimeter Shallow

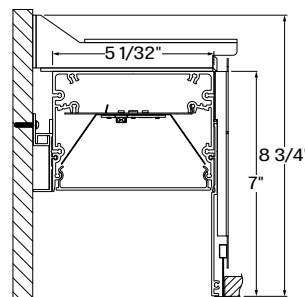

V5PERD - Via 5 Perimeter Deep

3D VIEW

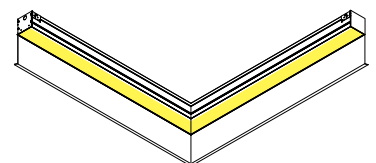

V3PERDPAT - Via 5 Perimeter Deep Pattern

TECHZONE™ & USG Compatible

VIA5PER-PAT-RECESSED-SPEC-REV1


Page: 1 / 8

March 8, 2022


www.Lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.
Lumenwerx ULC. reserves the right to change or modify product specifications without notification



PATTERN - LEVELED CORNER WITH END SLEEVE

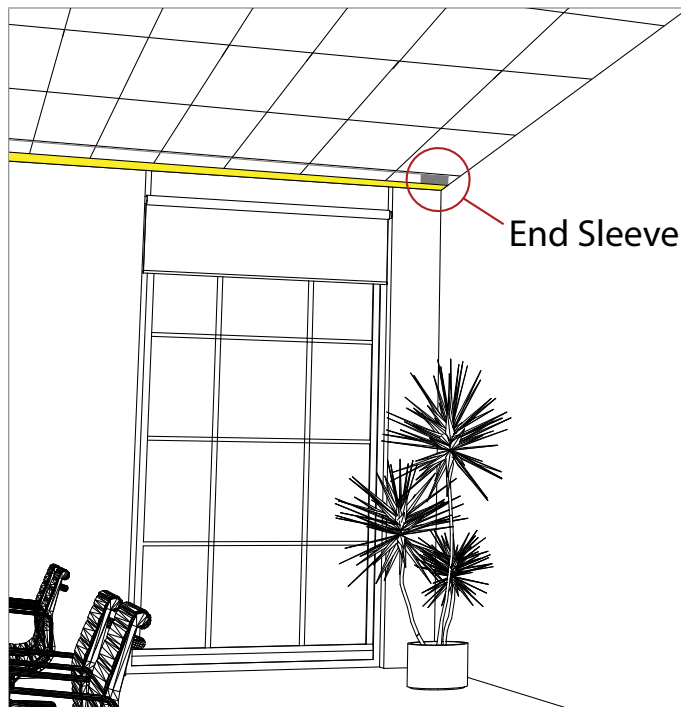

PATTERN - LEVELED CORNER WITH MID SLEEVE

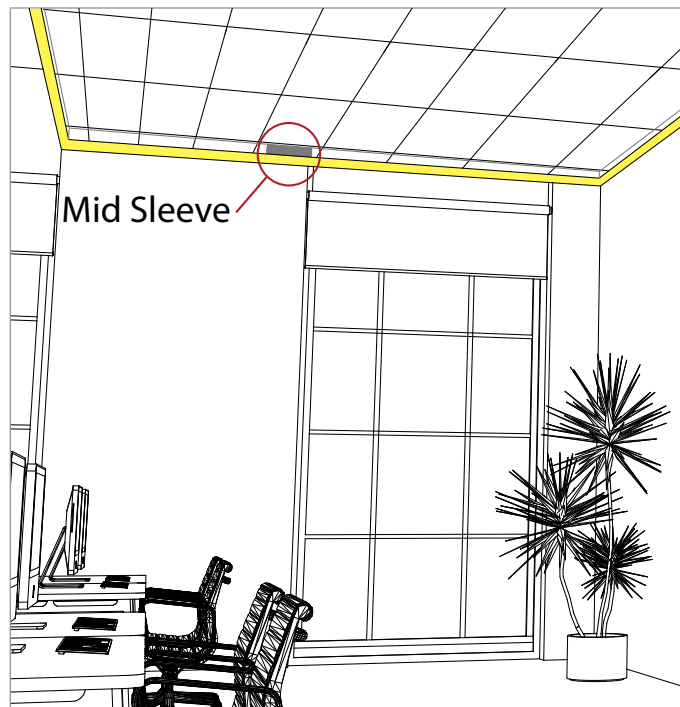


HOW TO SPECIFY A PATTERN?

Please follow these steps when specifying in order to be as precise as possible.

- (1) We require a drawing illustrating the pattern you are trying to achieve - anything from a simple line drawing to elaborate architectural drawings will suffice. Please mark clearly on the drawing the location of the wall.
- (2) Under **PATTERN LENGTH**, enter the overall length of your pattern - either in feet or inches.
- (3) Under **CORNER TYPE**, please enter LEVO for leveled outside corner or LEVI for leveled inside corner.
- (4) Under **CORNER DEGREE**, please enter the angle in degrees of each corner required to complete your pattern, followed by the number of corners.
- (5) Under **TELESCOPIC SLEEVE**, please enter the quantity and type of sleeve if applicable.

PATTERN LENGTH	CORNER TYPE	CORNER DEGREE	ADJUSTABLE SLEEVE
#FT - nominal length in feet #IN - length in inches Continuous Run - for luminaires over 12'	LEVO - leveled outside corner LEVI - leveled inside corner	90(#) - 90 degrees, specify number of corners (#) #(#) - Other degrees, specify the angle degree #, followed by the number of corners (#)	TES - optional adjustable end sleeve (for a minimum 5FT fixture length) #TMS - optional adjustable mid sleeve (for a minimum 5FT fixture length, maximum 1 sleeve per section)

MID SLEEVE AND END SLEEVE APPLICATION

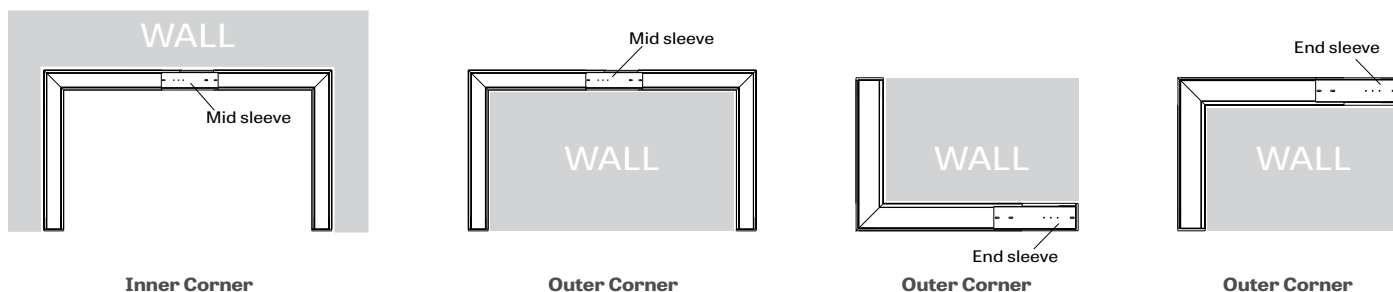

VIA 5 PERIMETER - PATTERNS

OPTICS

HIGH-EFFICIENCY LAMBERTIAN OPTIC (HLO) - The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. Luminaire brightness is controlled by the flux-to-shielding area ratio.


LIGHT SOURCE - LED

Custom linear array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

PERFORMANCE PER 4' AT 4000K

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	4000K	17.5	2000	115
medium output	4000K	26.5	3000	114
high output	4000K	36	4000	111

LIGHT DISTRIBUTION

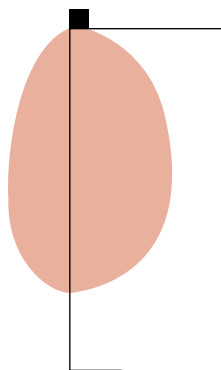

V5PERD-HLO-
LED-80-750-40-20
Wall Luminaires: 20' run
Lumen Output: 750 lm/ft
Watts: 8.3 watts/ft
Ceiling Height: 10'
Efficacy: 90 lpw


Foot Candles on 20' wide wall, 10' ceiling

156.9	154.3	162.4	152.9	153.0	152.9	152.9	163.0	154.4	157.5
14.8	14.1	13.1	12.7	12.6	12.6	12.7	13.1	14.2	15.8
8.6	8.0	7.2	6.9	6.8	6.8	6.8	7.2	8.1	8.7
7.0	6.5	6.0	5.8	5.8	5.8	5.9	6.1	6.5	7.0
6.2	5.9	5.5	5.6	5.9	5.9	5.7	5.5	5.9	6.4

LUMINAIRE LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

Joining system

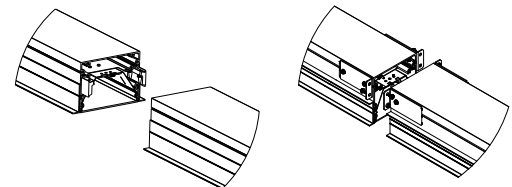

Drywall joining

Grid joining

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% (specify 2-wire, or Ecosystem Dim-to-Off), eldoLED 1% ECodrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white), Quadro (RGBW) emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

EMERGENCY


Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator; minimum of 90 minutes operation, up to 1000 lumens per 4ft (25°C) emergency lighting output. Recharge time of 24 hours.

VIA 5 PERIMETER - PATTERNS


LUMENWERX
W W W . L u m e n w e r x . C O M

MOUNTING OPTIONS


Recess mount into exposed or concealed T-Bar or Tegular grid ceiling,

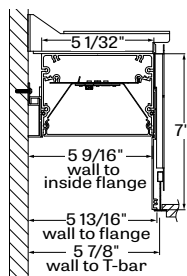


TG9 - tegular 9/16"

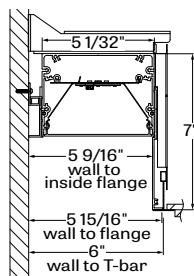


TG15 - tegular 15/16"

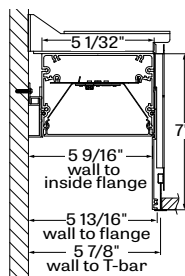

TB9 - t-bar 9/16"

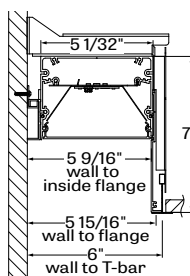


TB15 - t-bar 15/16"

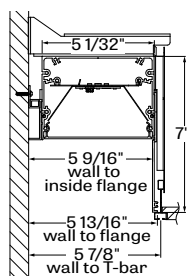


ST - screw slot t-bar


Mounting for drywall ceilings are available with visible trim, mud flange, trim or trimless.



DTL - drywall trimless



DTR - drywall trim



DMF - drywall mud flange

FINISH

Interior - 95%, reflective matte powder coated white paint

Exterior - matte white powder coating.

Custom finishes are also available.

CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

STANDALONE CONTROLS

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, location and functionality of the sensor within the luminaire are selected by Lumenwerx.

Three types are available:

OMS: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

ODS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

OCS: Both an occupancy and a daylight sensor are installed in the luminaire.

CONNECTED CONTROLS

With Connected Controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Enlighted, Osram, Acuity nLight, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.

Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with Connected Controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.

VIA 5 PERIMETER - PATTERNS

Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

CONSTRUCTION

Housing - Extruded aluminum (0.095" nominal) up to 90% recycled content

Interior brackets - Die formed cold rolled sheet steel 18 gauge thick

Joining system - Die cast zinc (0.95" nominal) and die formed galvanized sheet 18 gauge

Reflectors - Flat rolled aluminum sheet 0.040" thick precisely die formed, 95% reflective matte white painted

Recessed flanges - Extruded aluminum (0.075" nominal) up to 90% recycled content

End plate - Die formed cold rolled sheet steel 18 gauge thick

MAINTENANCE

LED boards are housed in a removable cartridge for easy replacement. Driver is accessible from below.

WEIGHT

Via 5 Perimeter 4ft - 11.78lbs - 5.35kg

Via 5 Perimeter 8ft - 23.79lbs - 10.8kg

Via 5 Perimeter 12ft - 35.24lbs - 16kg

CERTIFICATIONS

ETL - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

IC rated - suitable for direct contact with insulation.




WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications.

VIA 5 PERIMETER - PATTERNS




ADJUSTABLE SLEEVE INSTALLATION

Adjustable sleeve is designed to provide on-site luminaire adjustability of +2.5" to -4.5". A sleeve accommodates an easy installation and maintenance. **Available for fixtures over 5ft long.** Please read the instruction below before you submit your order.

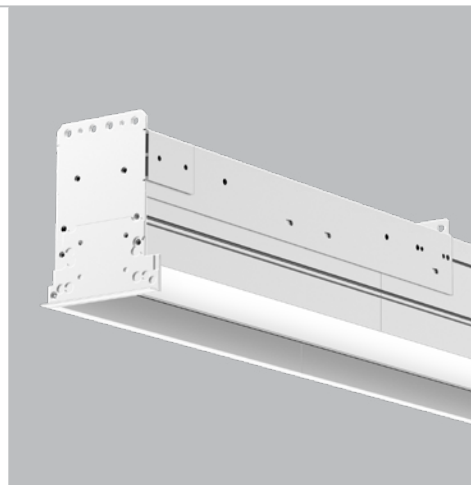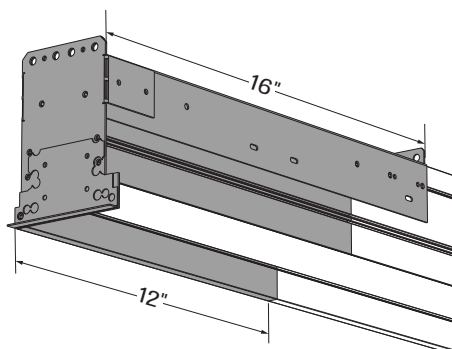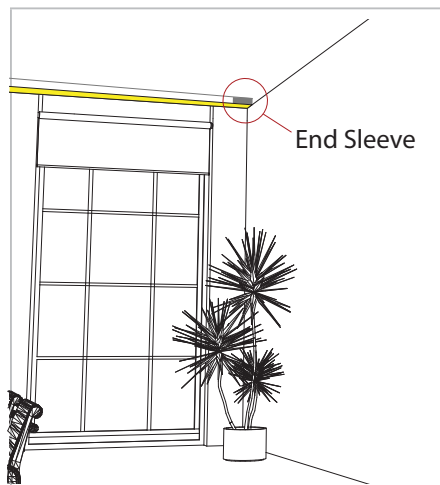

TES - End sleeve

X = fixture measure provided by client
X+2.5" = measurement built and supplied

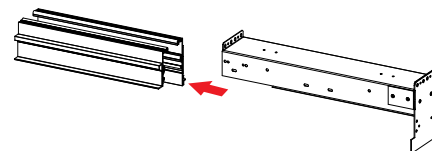
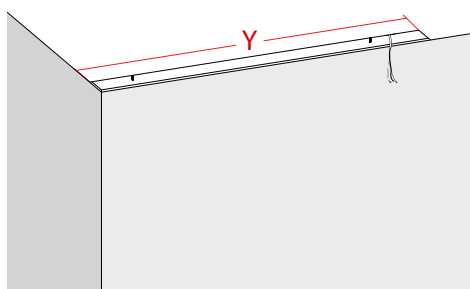
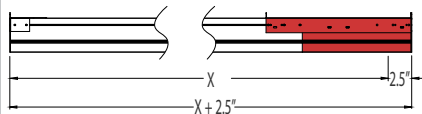


STEP 1 - ACTUAL SIZE PRODUCT

STEP 2 - MEASURE THE OPENING ON SITE

STEP 3 - REMOVE EXTRUSIONS FROM SLEEVE BASE

$(X+2.5) - Y$ = length to cut the sleeve's extrusions

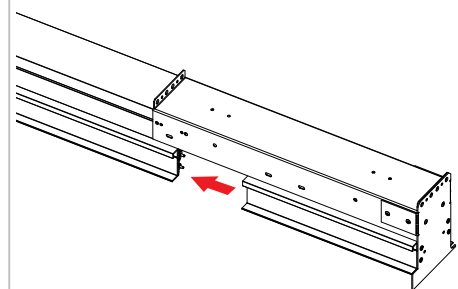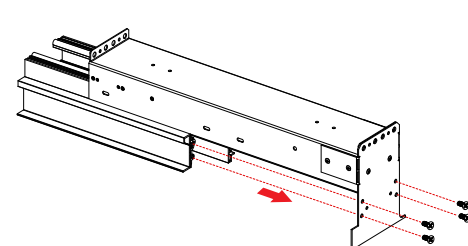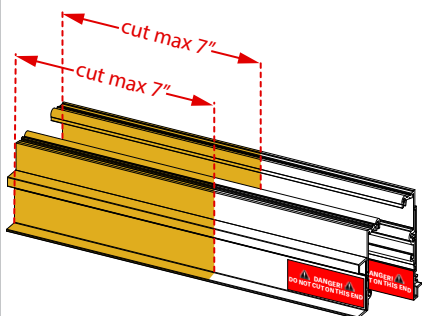

STEP 4 - CUT THE EXTRUSIONS

STEP 5 - PUT EXTRUSIONS BACK ON SLEEVE BASE

STEP 6 - RECONNECT SLEEVE BASE TO FIXTURE


FOR MORE DETAILS, SEE OUR WEBSITE FOR INSTALLATION INSTRUCTIONS BY CEILING AND MOUNTING TYPE

VIA 5 PERIMETER - PATTERNS


LUMENWERX
W W W . L u m e n w e r x . C O M

ADJUSTABLE SLEEVE INSTALLATION


Adjustable sleeve is designed to provide on-site luminaire adjustability of +2.5" to -4.5". A sleeve accommodates an easy installation and maintenance. **Available for fixtures over 8ft long.** Please read the instruction below before you submit your order.

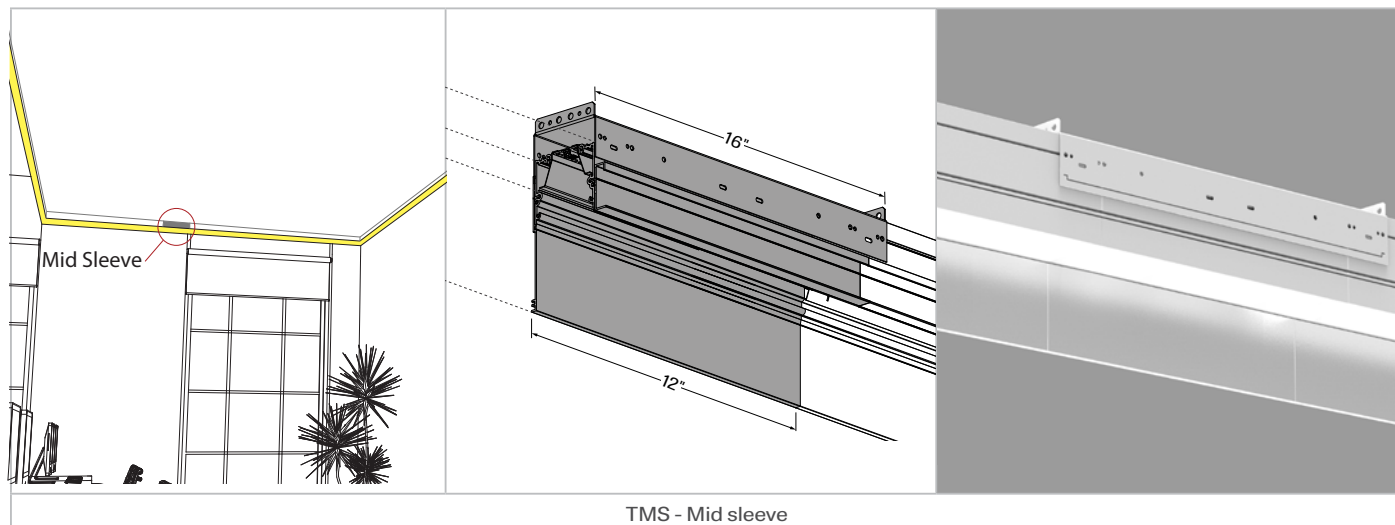


X = fixture measure provided by client
X+2.5" = measurement built and supplied

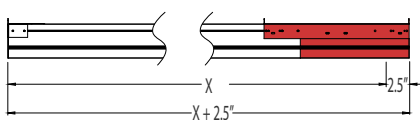

STEP 1 - ACTUAL SIZE PRODUCT

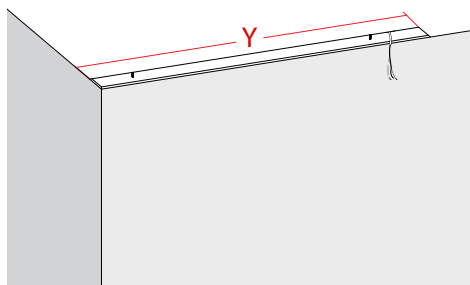


STEP 2 - MEASURE THE OPENING ON SITE

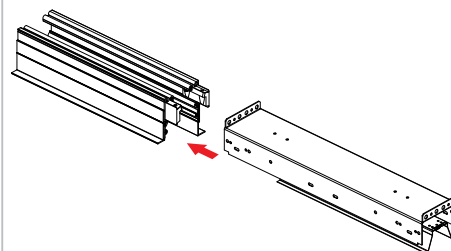


STEP 3 - REMOVE EXTRUSIONS FROM SLEEVE BASE


(X+2.5) - Y = length to cut the sleeve's extrusions

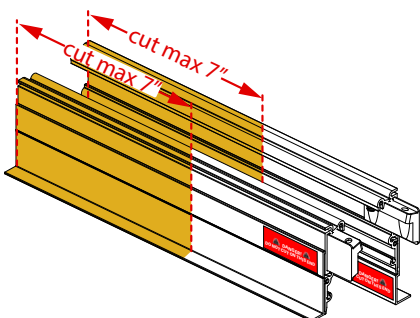

STEP 4 - CUT THE EXTRUSIONS

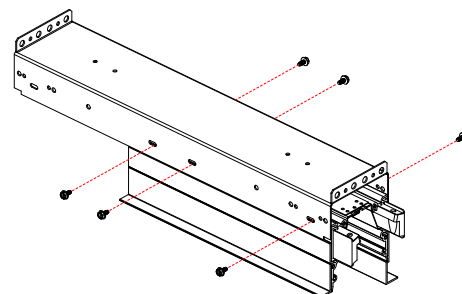

STEP 5 - PUT EXTRUSIONS BACK ON SLEEVE BASE

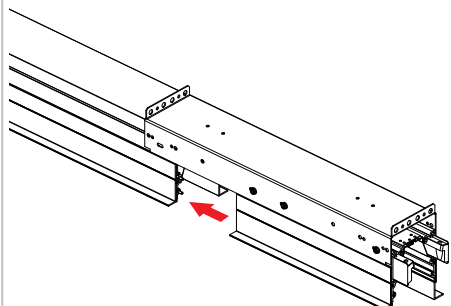


STEP 6 - RECONNECT SLEEVE BASE TO FIXTURE

FOR MORE DETAILS, SEE OUR WEBSITE FOR INSTALLATION INSTRUCTIONS BY CEILING AND MOUNTING TYPE

VIA 5 PERIMETER - PATTERNS


500 LUMEN AT 80CRI - LOW OUTPUT

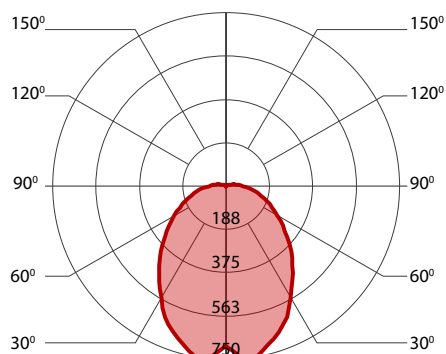

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	2700K	19	2000	106
low output	3000K	18.5	2000	109
low output	3500K	18	2000	112
low output	4000K	17.5	2000	115


750 LUMEN AT 80CRI - MEDIUM OUTPUT

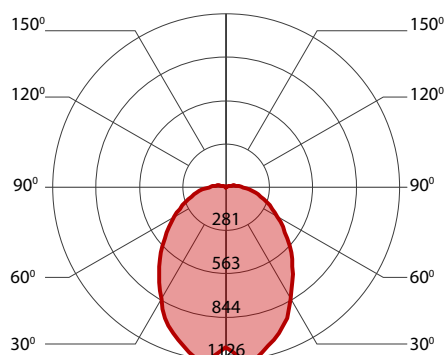

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
medium output	2700K	29	3000	104
medium output	3000K	28	3000	108
medium output	3500K	27.5	3000	110
medium output	4000K	26.5	3000	114

1000 LUMEN AT 80CRI - HIGH OUTPUT

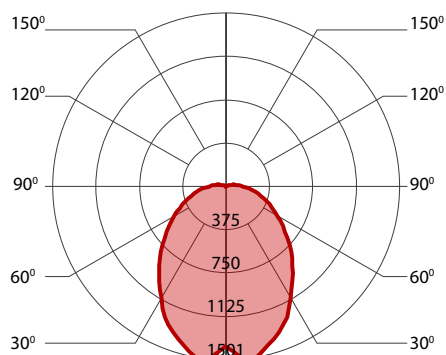

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
high output	2700K	39	4000	102
high output	3000K	38	4000	105
high output	3500K	37.5	4000	107
high output	4000K	36	4000	111