


NOVA 2x4 LED

RECESSED



LUMENWERX
WWW.LUMENWERX.COM

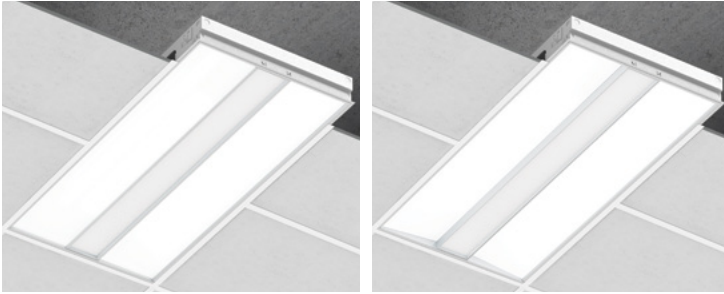

Grid - shown with a Nova flat lens

Grid - shown with a Nova Slope lens

PROJECT: _____

APPROVED BY: _____

SIGNATURE: _____

TYPE	QTY
------	-----

DESCRIPTION

Nova is an efficient architectural LED troffer with a distinctive luminous shielding that distributes gentle brightness from the sides of its central optical element. Using advanced LED engines, Nova provides highly efficient illumination and offers comprehensive ceiling, electrical, and controls options in 2x2, 1x4, and 2x4 sizes. Nova is available with both Flat and Slope side diffusers. See separate spec sheets for other available mountings.



up to 108 lm/w performance

IC RATED

ORDER GUIDE

LUMINAIRE ID	SIZE	CENTER OPTICS	SIDE OPTICS	LIGHT SOURCE	CRI	LUMEN PACKAGES	COLOR TEMP.
NOVRF - nova recessed flat NOVRS - nova recessed slope	24 - 2'x4'	PMO - Precision Micro-Prism Optic	HLO - High-Efficiency Lambertian Optic	LED - high performance LED	80 - 80CRI 90 - 90CRI	4000 - min. low output 4000lm 5500 - medium output 5500lm 6800 - max. high output 6800lm #### - other required lm	27 - 2700k 30 - 3000k 35 - 3500k 40 - 4000k


VOLTAGE	DRIVER	ELECTRICAL	MOUNTING	FINISH	CONTROLS
120 - 120V 277 - 277V UNV - 120V-277V 347 - 347V (not available with Lutron)	D1 - 1% dimming 0-10V DA - Dali LTEA2W - Lutron 1% - 2 wire FF 120V LDE1 - Lutron Hi-lume 1% Eco LDE5 - Lutron 5% EcoSystem	1 - 1 circuit +EB - emergency battery pack +GTD### - generator transfer device, 120V or 277V	TG9 - tegular 9/16" TG15 - tegular 15/16" TB9 - t-bar 9/16" TB15 - t-bar 15/16" ST - screw slot t-bar DF - drywall kit	W - matte white CF# - custom finish specify RAL#	STANDALONE CONTROLS OMS - Onboard Occupancy ODS - Onboard Daylight OCS - Onboard Occupancy & Daylight CONNECTED CONTROLS CCS() - LU-Lutron, EN-Enlighted, OS -Osram, CR -Crestron. To specify see information on page 5

See page 4 for ordering code detailed information


OPTIONS

- FU** - fuse
- FWC** - flexible whip cable (6' std)
- AR** - air return (for grid only)
- CP** - Chicago Plenum
- CU** - custom

CROSS SECTION

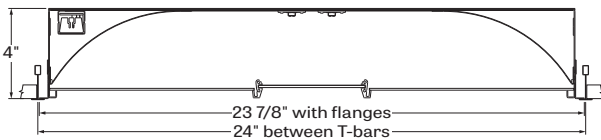

NOVRF - nova flat t-bar 9/16

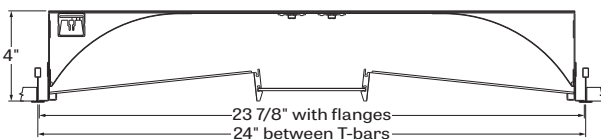

NOVRS - nova slope t-bar 9/16

OPTICS



NOVRS - nova slope




NOVRF - nova flat


NOVA 2x4 LED

RECESSED


NOVA FLAT

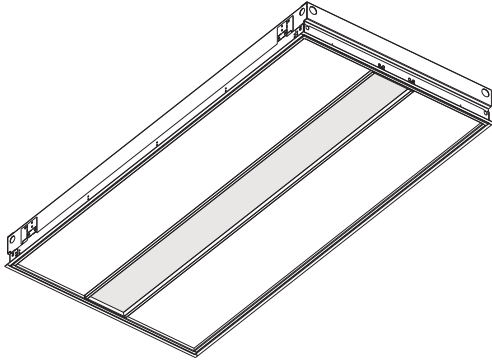


NOVA SLOPE

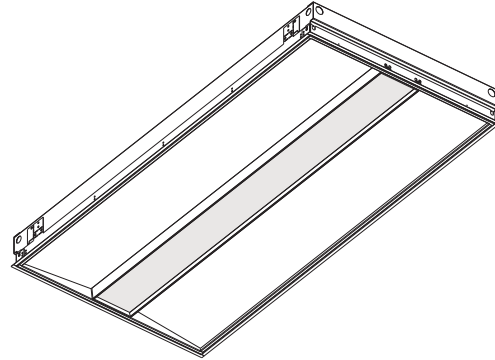


NOVA FLAT - TG9 - tegular 9/16"

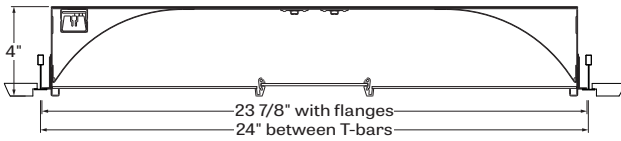


NOVA SLOPE - TG9 - tegular 9/16"

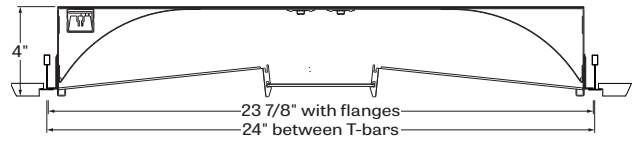


NOVA FLAT - TG15 - tegular 15/16"

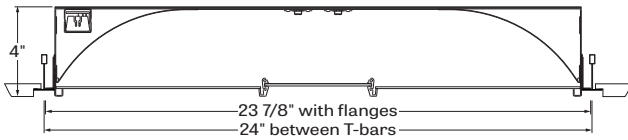


NOVA SLOPE - TG15 - tegular 15/16"

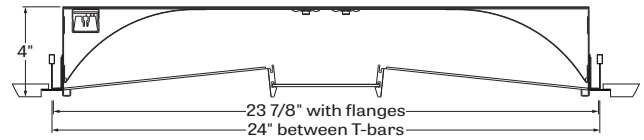


NOVA FLAT - TB9 - t-bar 9/16"

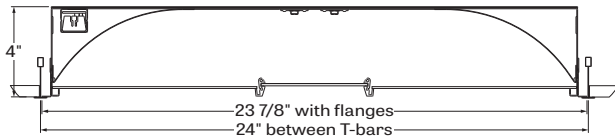


NOVA SLOPE - TB9 - t-bar 9/16"

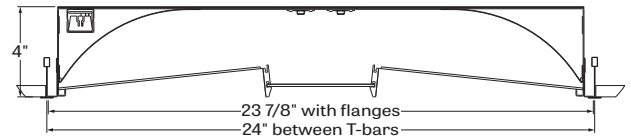


NOVA FLAT - TB15 - t-bar 15/16"

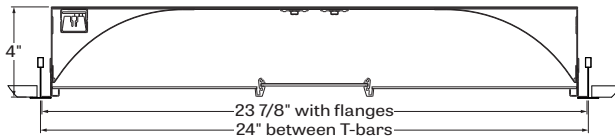


NOVA SLOPE - TB15 - t-bar 15/16"

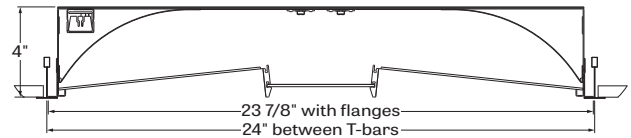


NOVA FLAT - ST- screw slot t-bar

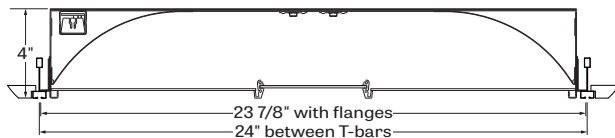


NOVA SLOPE - ST- screw slot t-bar

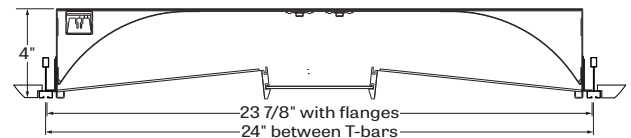

NOVA FLAT - DW- drywall kit

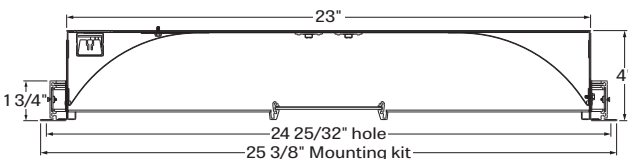

NOVA SLOPE - DW- drywall kit

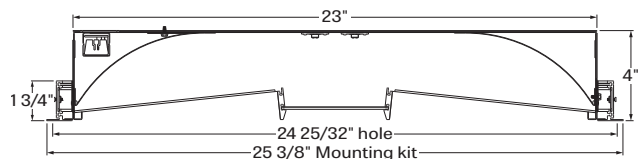


NOVA 2x4 LED

RECESSED

ELECTRICAL CIRCUITS


DIMMING 0-10V -

1 Circuit

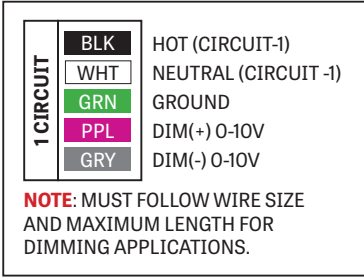


LUTRON 1% 2-wire FF 120V -

1 Circuit

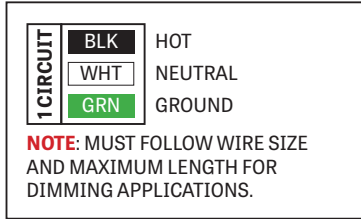


LUTRON LDE1 1%/LDE5 5% EcoSystem -

1 Circuit

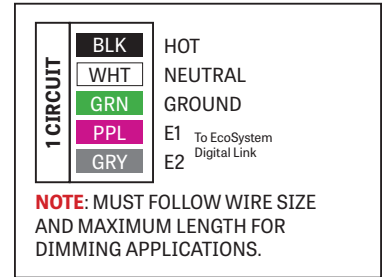


DIMMING 0-10V -

1 Circuit + Emergency Battery

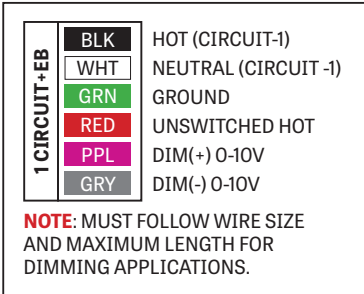


LUTRON 1% 2-wire FF 120V -

1 Circuit + Emergency Battery

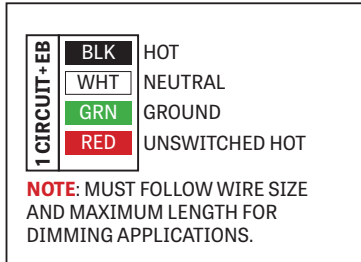

LUTRON LDE1 1%/LDE5 5% EcoSystem -

1 Circuit + Emergency Battery

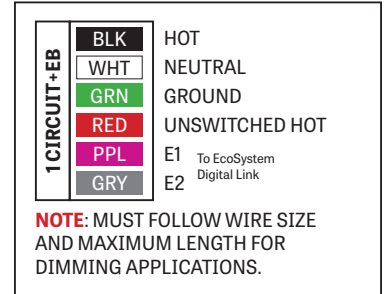

NOVA 2x4 LED

RECESSED

OPTICS

CENTER LENS - PRECISION MICRO-PRISM-OPTIC (PMO) - utilizes a specially designed catadioptric lens that combines refraction and internal reflection. The square-base prism is 24% the size of those used in a high-performance fluorescent lens. The exclusive two-dimensional array of prisms is designed to eliminate the glare found at higher viewing angles and as such, enables a glare cut-off at a 45° viewing angle.

The acrylic material itself is untinted, relying entirely on catadioptric control for effective source obscuration. A highly efficient TIR process at the acrylic-air interface on the prism surfaces redirects incident light with less than a 0.1% loss per reflection. As a result, these LumenWerx optics attain a high optical efficiency greater than 90%, while maintaining visual comfort at normal viewing angles and presenting a pleasing luminous appearance.

SIDE LENS - HIGH EFFICIENCY LAMBERTIAN OPTIC (HLO) - shielding of diffusing 0.075" thick acrylic with up to 88% transmission and good source obscuration.

LIGHT SOURCE - LED

Custom array of mid-flux LED's are mounted directly to the housing for optimal thermal performance. Available in 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	4000K	37	4000	108
medium output	4000K	53	5500	103
high output	4000K	66	6800	103

ELECTRICAL


Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% (specify 2-wire, or Ecosystem Dim-to-Off), Lutron 5-Series (5% Ecosystem), DMX (RDM compatible) and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

EMERGENCY


Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation, up to 1300 lumens (25°C) emergency lighting output. Recharge time of 24 hours.

MOUNTING OPTIONS


Recess mount into exposed or concealed T-Bar or Tegular grid ceiling




TG9 - tegular 9/16"




TG15 - tegular 15/16"



TB9 - t-bar 9/16"





TB15 - t-bar 15/16"



ST - screw slot t-bar

A separate kit for mounting fixtures into drywall ceilings

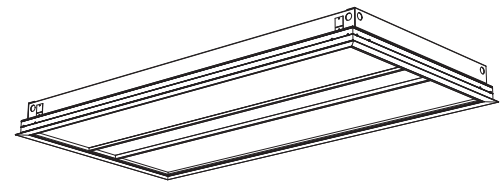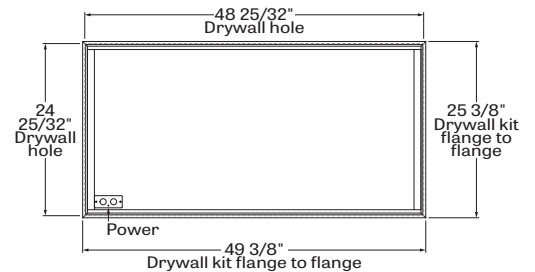

DF - drywall kit

FINISH

Interior reflectors - 95% reflective, matte white powder coating

Exterior - matte white powder coating.

Custom finish is also available.

CONTROLS

LumenWerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

STANDALONE CONTROLS

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, location and functionality of the sensor within the luminaire are selected by LumenWerx.


Three types are available:

OMS: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used.

Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

ODS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

OCS: Both an occupancy and a daylight sensor are installed in the luminaire.

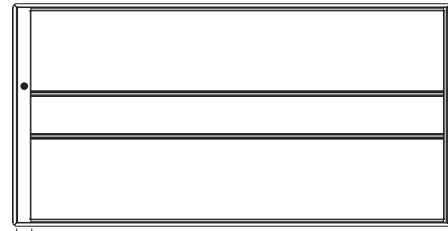

1 1/2"
Location of an Onboard control

CONNECTED CONTROLS

With Connected Controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron*, Enlighted, Osram ENCELIUM, Acuity nLight, Crestron and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

LumenWerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by LumenWerx, depending on the control system manufacturer.

LumenWerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a LumenWerx luminaire with Connected Controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact controls@lumenwerx.com to assure complete compatibility with intended control system and to fully specify the luminaire.


Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for LumenWerx to create shop drawings and submittals.

* Lumenwerx offers a Lutron Vive-Enabled fixture option using either the DFCSJ-OEM-OCC (OCS Option) or DFCSJ-OEM-RF (wireless only, no sensor) Integral Fixture Modules and a DALI or EcoSystem LED driver based on customer dimming requirements.

Please contact our controls department at controls@lumenwerx.com for further assistance.

OPTIONS

The air return option consists in a discreet, yet efficient, slot pattern integrated into the side flanges of the luminaire, allowing the airflow to exhaust into plenum space, creating a clean, pleasant look of the ceiling.

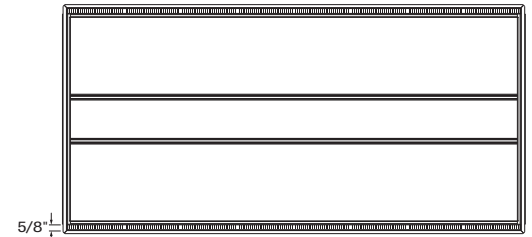

Air Return

CONSTRUCTION

Housing - Die formed cold rolled sheet steel 20 gauge thick, matte white powder coating.

Reflectors - Cold rolled steel 0.030" thick precisely die formed, 95% reflective matte white painted.

Interior brackets - Die formed cold rolled sheet steel 20 gauge thick.

Center basket - Extruded Aluminum 0.07" nominal, matte white and lens made in clear PMMA precisely formed into optical micro-structures forms.

Side lenses - Frost impact acrylic lens 88% transmissive.

Drywall kit - Extruded Aluminum 0.07" nominal, matte white powder coating.

WEIGHT

Nova 2x4: 36.23lbs.+3.74lbs. (drywall kit) - 16.45kg+1.7 kg (drywall kit)

NOVA 2x4 LED

RECESSED

CERTIFICATIONS

ETL - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

DLC - Testing to DLC requirements, for this product, have been completed by an Accredited Laboratory and certified by DLC.

Lighting facts - testing products and reporting performance results according to industry standards.

Chicago plenum - City of Chicago Approved (CCEA)

IC rated - suitable for direct contact with insulation.


WARRANTY

LumenWerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. LumenWerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

NOVA 2x4 LED

RECESSED

4000 LUMEN AT 80CRI - LOW OUTPUT

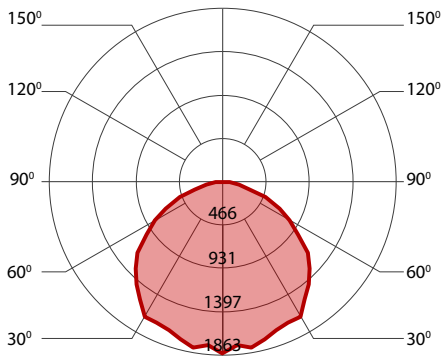


PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	2700K	40.5	4000	99
low output	3000K	40	4000	101
low output	3500K	38	4000	104
low output	4000K	37	4000	108




5500 LUMEN AT 80CRI - MEDIUM OUTPUT

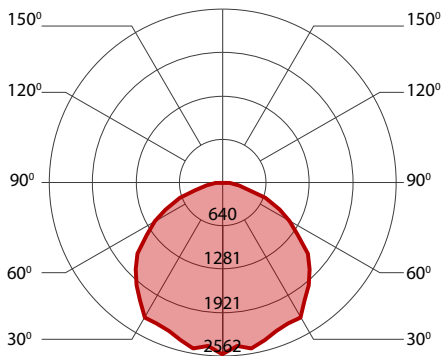


PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
medium output	2700K	52.5	5500	95
medium output	3000K	57	5500	97
medium output	3500K	55	5500	100
medium output	4000K	53	5500	103



6800 LUMEN AT 80CRI - HIGH OUTPUT

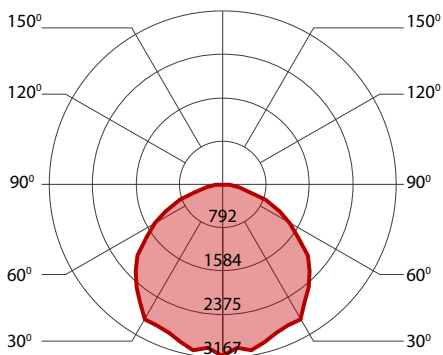

PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
high output	2700K	71.5	6800	95
high output	3000K	70	6800	97
high output	3500K	68	6800	100
high output	4000K	66	6800	103

